
DB-11

Force Transducer

FEATURES

- Nominal capacity: 20 N, 30 N, 50 N, 75 N and 100 N
- Accuracy: 0.5 %
- Strain gauge area double-sealed to IP 67 protection class
- High-strength anodized aluminum alloy measuring spring
- Aluminum alloy protective tube with two nitril-rubber membranes
- Shielded connection cable
- EX approval




DESCRIPTION

The Magtrol DB-11 Transducer is designed for measuring both static and dynamic forces. Using strain gauge technology, a deformation of the sensing element provides an electrical signal proportional to the force being measured.

APPLICATIONS

Made entirely of aluminum, the DB-11 Transducer can be used for many low-range force measurements. Manufactured according to EX approval and connected to a signal conditioner, the DB-11 is ideal for weighing and dosing applications in explosive dust atmospheres.

SYSTEM CONFIGURATION

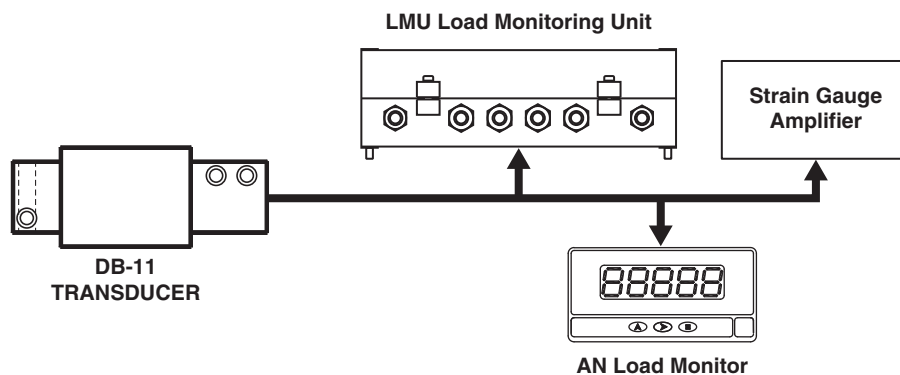

TECHNICAL RATINGS

MECHANICAL CHARACTERISTICS	
Nominal Force	20 N, 30 N, 50 N, 75 N and 100 N
Accuracy Class	0.5%
Overload Limit	150% (transducer with 20 N nominal load has built-in protection)
Overload at Rupture	> 300% (but at least 200 N)
Maximum Dynamic Load (double amplitude)	70%
Displacement at Nominal Force	≈ 0.5 mm
Weight	≈ 0.16 kg
ELECTRICAL CHARACTERISTICS	
Nominal Sensitivity	max. 2 mV/V ± 5% (according to type)
Input Impedance	350 ± 5 Ω
Output Impedance	350 ± 5 Ω
Insulation Resistance	> 5 × 10 ⁹ Ω
Nominal Supply Voltage	5 V to 10 V
Combined Error (nonlinearity + hysteresis)	0.5%
Repeatability	< ± 0.05%


ENVIRONMENTAL CHARACTERISTICS	
Reference Temperature	+23 °C
Operating Temperature	-10 °C to +40 °C
Temperature Influence: On Zero	< ± 0.2% / 10 K
Temperature Influence: On Sensitivity	< ± 0.7% / 10 K
Protection Class	IP 67 (according to DIN 40050)
EX Approval	EX II 3 D
CONNECTION CABLE	
Cable Length	1.5 m

PIN CONNECTIONS

Pin	Color Code
+ supply	brown
- supply	white
+ signal	green
- signal	yellow

DIMENSIONS

Shielded connection cable 1.5 m long.
The shielding is not attached to the transducer body.

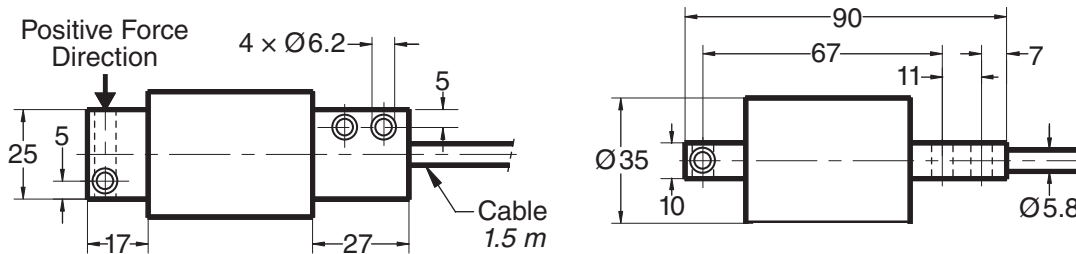

Due to the continual development of our products, we reserve the right to modify specifications without forewarning.



www.magtrol.com

MAGTROL INC
70 Gardenville Parkway
Buffalo, New York 14224 USA
Phone: +1 716 668 5555
Fax: +1 716 668 8705
E-mail: magtrol@magtrol.com

MAGTROL SA
Centre technologique Montena
1728 Rossens/Fribourg, Switzerland
Phone: +41 (0)26 407 3000
Fax: +41 (0)26 407 3001
E-mail: magtrol@magtrol.ch

Subsidiaries in:
Great Britain
Germany • France
China • India
Worldwide Network
of Sales Agents

